



# NodeA

`put("compressedNodeB", "Key", val);`

DS



CompressedRemoteDSM

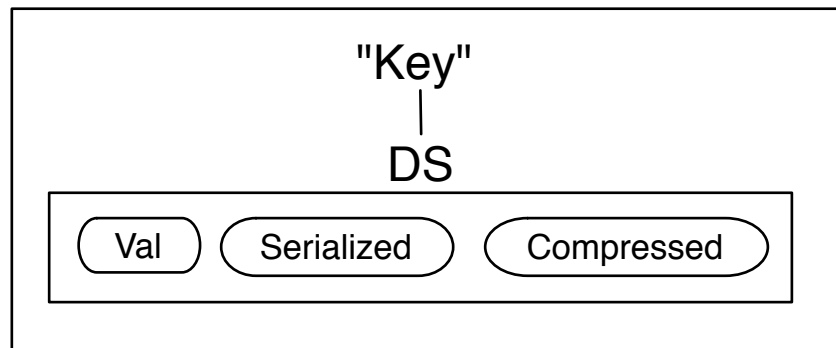


Alice Packet



# NodeB

Receiver

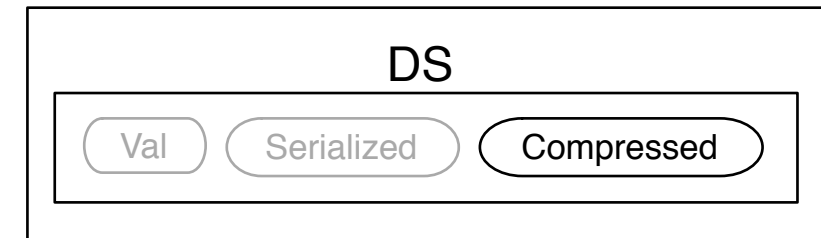

`receiver.setKey("Key");`

Local DSM

