


# NodeA

```
put("compressedNodeB", "Key", val);
```

DS



CompressedRemoteDSM

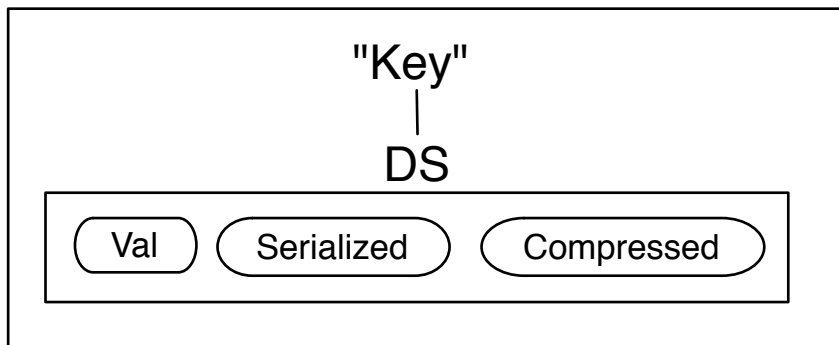

Alice Packet




# NodeB

DS



```
receiver.asClass(Integer.class);
```

Receiver

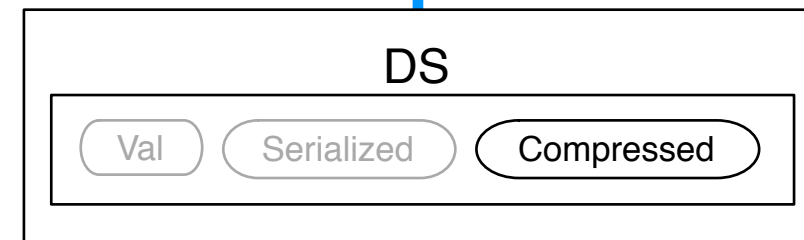

```
receiver.setKey("Key");
```

Local DSM

